Performance Bulletin

YPB#: PB_SWT_2186F_T60TLR_4-25-06_PNT **Test Date:** 4/25/06






T60TLR

Performance Data

RPM	MPH	GPH	MPG
1000	3.1	0.3	10.33
1500	4.2	0.5	8.40
2000	5.4	0.8	6.75
2500	6.8	1.0	6.80
3000	8.1	1.4	5.79
3500	10.7	1.6	**6.69**
4000	13.1	2.2	5.96
4500	15.3	2.7	5.67
5000	17.8	3.4	5.24
5500	19.9	4.3	4.63
5900	**21.7**	**5.5**	**3.95**

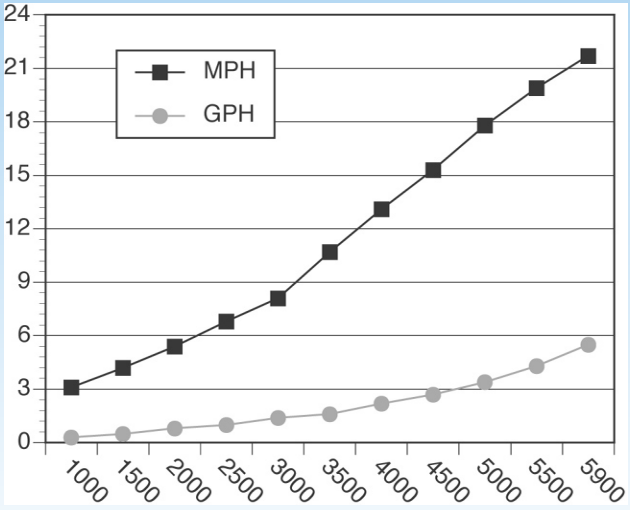

Test performed and certified by Yamaha Application Engineers.

Boat Manufactured By:
Sweetwater • 4500 Middlebury Street • Elkhart, IN 46516
(574) 522-8381 • www.sweetwaterboats.com

Sweetwater 2186F

Length	21'
Beam	8' 6"
Dry Weight (published)	1,597 lbs.
Max HP	90
Fuel Capacity	24 gals. (optional)
Weight as Tested (approximate)	2,405 lbs.

Yamaha T60TLR

Horsepower	60
Fuel Induction	Electonic Fuel Injection
Displacement	60.8 cu. in.
Weight	248 lbs.
Gear Ratio	2.33
Mounting Height	#2

Propeller

Series	Dual-Thrust Aluminum
Diameter/Pitch	14 x 11
Yamaha Part #	68S-45941-00-EL

Test Conditions

Number of People	2
Air Temperature	41° F
Water Temperature	43° F
Elevation	610 ft.
Wind Velocity	5-10 MPH

Comments:
Test weight includes 18 gallons of fuel, one battery, safety and test equipment.

Note:
Data may vary due to changes in weather, elevation, options and equipment, load and boat bottom conditions. Fuel data gathered with Yamaha's Command Link® fuel management system. Speed data gathered with GPS receiver.

Outboard Manufactured By:
Yamaha Motor Corp., USA • OEM Division, Marine Group
1270 Chastain Road NW • Kennesaw, GA 30144 • (800) 88-YAMAHA

For other Performance Bulletins, visit www.yamaha-motor.com.